

---

## High Power Unidirectional TVS

---

### **Compliance Standard**

- ◆ IEC 61000-4-2
- ◆ IEC 61000-4-4
- ◆ IEC 61000-4-5
- ◆ EN 50121

### **Applications**

- ◆ Industrial
- ◆ Railway Application
- ◆ Surveillance
- ◆ Measurement


### **Features**

- ◆ 400W Peak Pulse Power
- ◆ Quick Response
- ◆ Low Clamping Voltage
- ◆ Low Leakage Current

### **Mechanical Characteristics**

- ◆ SMA Package
- ◆ Weight 60 Milligram (Approximate)
- ◆ Flammability Rating UL94V-0
- ◆ Lead Free Plating
- ◆ Reel Size 13"
- ◆ 5,000 PCS Per Reel

### **Package**



SMA

### **Device Symbol**



## DEVICE CHARACTERISTICS

| Maximum Rating              |           |           |                    |
|-----------------------------|-----------|-----------|--------------------|
| Parameter                   | Symbol    | Value     | Unit               |
| Peak Pulse Power            | $P_{PP}$  | 400       | Watt               |
| Lead Soldering Temperature  | $T_L$     | 260 (10s) | $^{\circ}\text{C}$ |
| Operating Temperature Range | $T_J$     | -55~150   | $^{\circ}\text{C}$ |
| Storage Temperature Range   | $T_{STG}$ | -55~150   | $^{\circ}\text{C}$ |

| ELECTRICAL CHARACTERISTICS @ 25 $^{\circ}\text{C}$ |         |                                       |            |               |                      |           |          |                     |
|----------------------------------------------------|---------|---------------------------------------|------------|---------------|----------------------|-----------|----------|---------------------|
| Part Number                                        | Marking | Breakdown Voltage $V_{BR}$<br>@ $I_T$ |            |               | $I_R$ @<br>$V_{RWM}$ | $V_{RWM}$ | $I_{PP}$ | $V_C$ @<br>$I_{PP}$ |
|                                                    |         | Min<br>(V)                            | Max<br>(V) | $I_T$<br>(mA) | ( $\mu\text{A}$ )    | (V)       | (A)      | (V)                 |
| SMAJ36A                                            | CP      | 40.0                                  | 44.2       | 1             | 5                    | 36.0      | 6.8      | 58.1                |

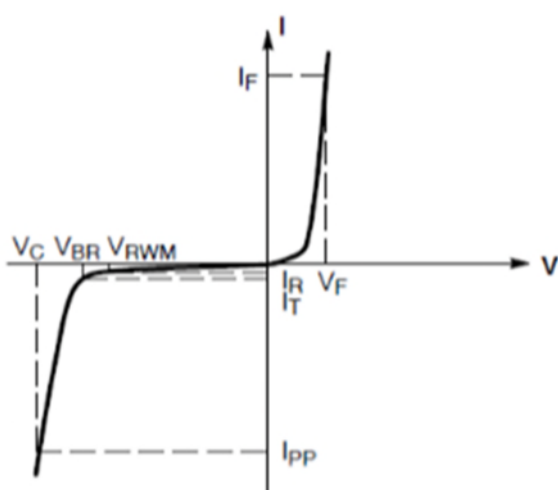


Figure1. I-V Characteristics

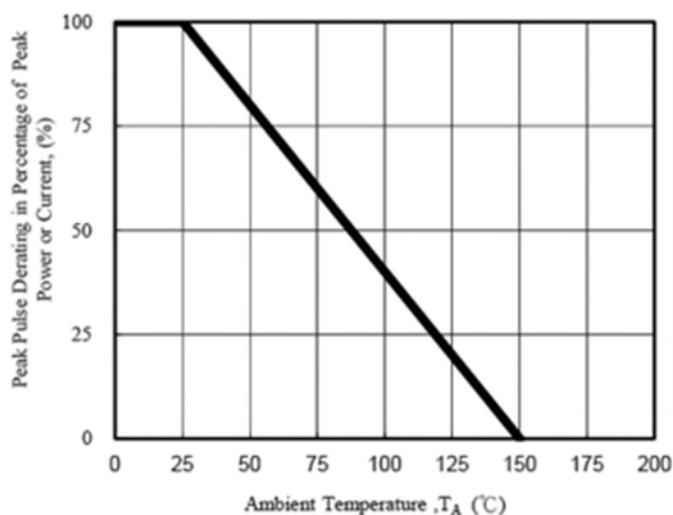


Figure2. Power Derating Curve

## DEVICE OUTLINE

| <i>Outline Dimension</i> |             |      |        |       |
|--------------------------|-------------|------|--------|-------|
| Symbol                   | Millimeters |      | Inches |       |
|                          | Min         | Max  | Min    | Max   |
| A                        | 2.51        | 2.76 | 0.109  | 0.099 |
| B                        | 4.10        | 4.55 | 0.179  | 0.162 |
| C                        | 1.23        | 1.63 | 0.049  | 0.064 |
| D                        | 1.96        | 2.26 | 0.077  | 0.089 |
| E                        | 4.87        | 5.22 | 0.192  | 0.206 |
| F                        | 0.75        | 1.51 | 0.030  | 0.060 |
|                          |             |      |        |       |



## LAYOUT PAD DIMENSION

| <i>Layout PAD Dimension</i> |             |      |        |       |
|-----------------------------|-------------|------|--------|-------|
| Symbol                      | Millimeters |      | Inches |       |
|                             | Min         | Max  | Min    | Max   |
| A                           | 5.30        | 5.70 | 0.208  | 0.224 |
| B                           | 1.50        | 1.80 | 0.059  | 0.071 |
| C                           | 1.70        | 2.10 | 0.067  | 0.083 |



| <i>Revision History</i> | <i>Description</i>           |
|-------------------------|------------------------------|
| v2.0                    | Re-organize datasheet layout |
|                         |                              |
|                         |                              |
|                         |                              |
|                         |                              |
|                         |                              |