
SURFACE MOUNT THYRISTOR

Compliance Standard

- ◆ IEC 61000-4-5 (Surge) 250A (8/20us)
- ◆ GR1089 (Surge) 100A (10/360us)
- ◆ ITU-T K.21 (Surge) 100A (5/310us)
- ◆ TIA-968-A (Surge) 80A (10/560us)

Applications


- ◆ T1/E1
- ◆ SLIC Line Interface
- ◆ ADSL/ISDN Line Interface
- ◆ Ethernet

Features

- ◆ Bi-directional Configuration
- ◆ Quick Response
- ◆ High Surge Capability
- ◆ Low Leakage Current

Mechanical Characteristics

- ◆ SMA Package
- ◆ Weight 60 Milligram (Approximate)
- ◆ Flammability Rating UL94V-0
- ◆ Lead Free Plating
- ◆ Reel Size 13"
- ◆ 5000 PCS Per Reel

Package**SMA****Device Symbol**


DEVICE CHARACTERISTICS

<i>Maximum Rating</i>			
Parameter	Symbol	Value	Unit
Surge Current—60Hz	I_{TSM}	20	A
Lead Soldering Temperature	T_L	260 (10s)	°C
Operating Temperature Range	T_J	-40~150	°C
Storage Temperature Range	T_{STG}	-55~150	°C


<i>Electrical Characteristics (@25 °C)</i>								
Part Number	V_{DRM} (Volt)	V_S (Volt)	I_S (mA)	I_{DRM} (uA)	I_H (mA)	I_T (A)	V_T (V)	C_o (pF)
NLC0080SMA	6	25	800	5	50	2.2	4	80

<i>Surge Rating @ 25 °C</i>						
Series	I_{PP} 2x10 μ s Amps	I_{PP} 8x20 μ s Amps	I_{PP} 10x160 μ s Amps	I_{PP} 10x560 μ s Amps	I_{PP} 10x1000 μ s Amps	di/dt Amps/ μ s
SMA	250	250	150	80	70	500


RATING CURVES

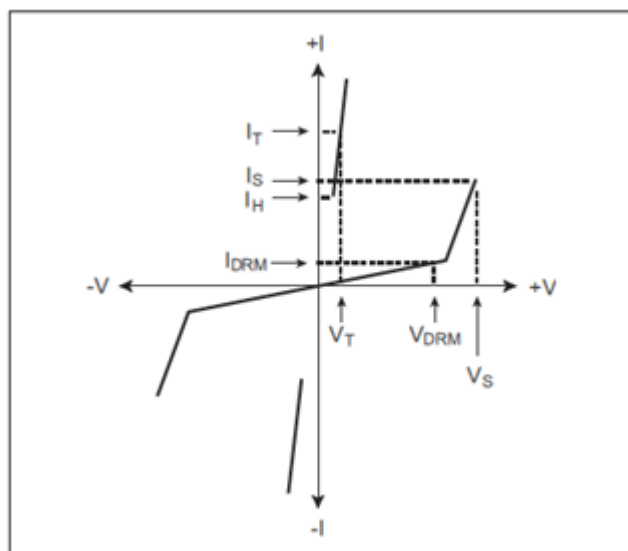


V-I Characteristics

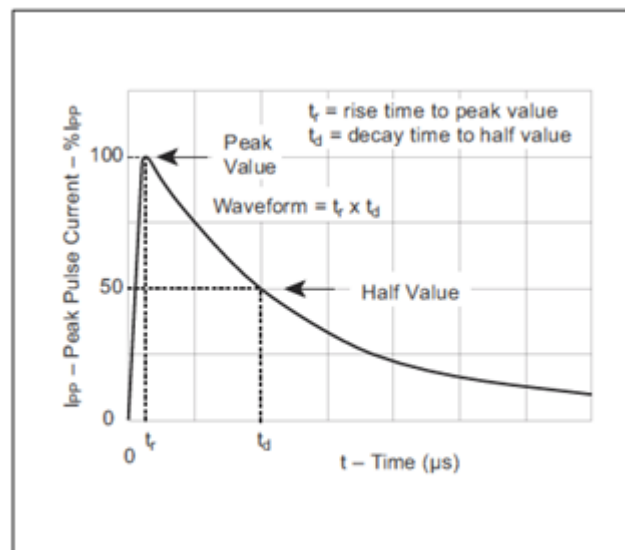

$t_r \times t_d$ Pulse Wave-form

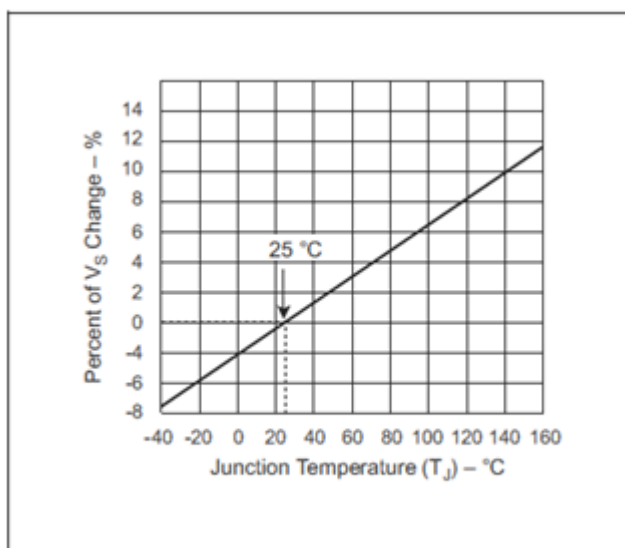



Normalized V_S Change versus Junction Temperature

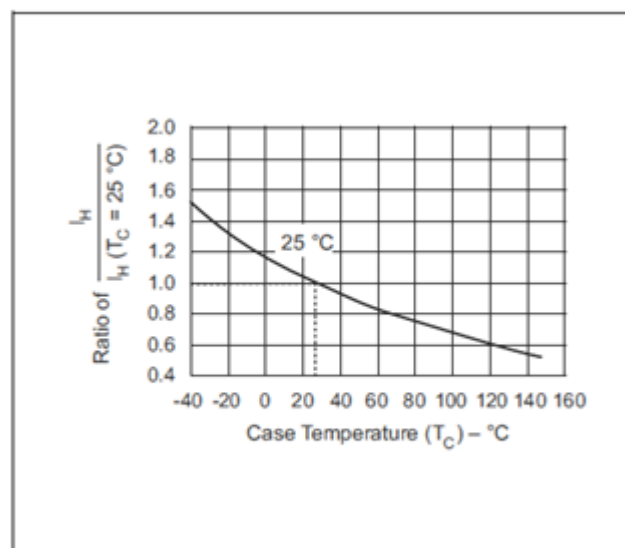

Normalized DC Holding Current versus Case Temperature


DEVICE OUTLINE

Outline Dimension				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	1.25	1.65	0.049	0.065
B	2.54	2.79	0.100	0.110
C	3.99	4.50	0.157	0.177
D	1.98	2.29	0.078	0.090
E	0.78	1.52	0.030	0.060
F	4.93	5.28	0.194	0.208
G	0.20TYP		0.008TYP	
H	0.15	0.31	0.006	0.012

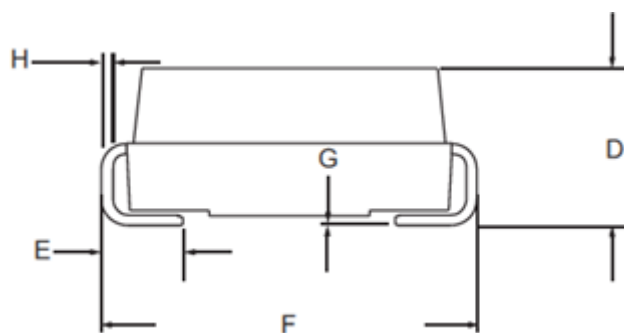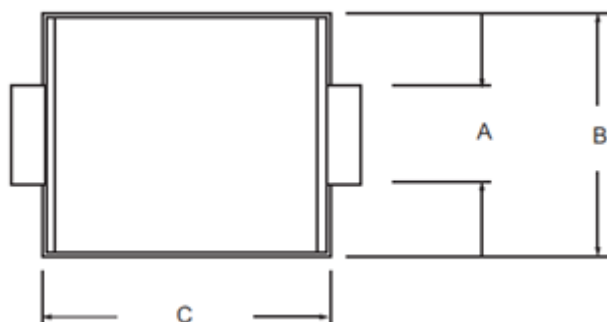

LAYOUT PAD DIMENSION

<i>Layout PAD Dimension</i>				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	5.80	6.20	0.228	0.244
B	1.70	1.90	0.067	0.075
C	2.00	2.20	0.078	0.087

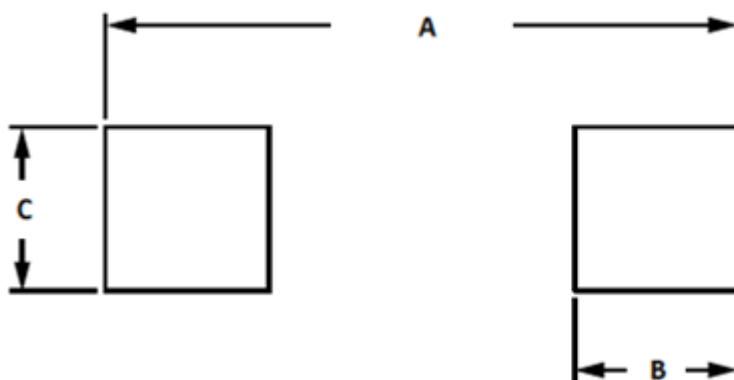

<i>Revision History</i>	<i>Description</i>
v2.0	Re-organize datasheet layout